



### **ATF DIII-MV** high performance transmission fluid

ATF DIII-MV is an ultra high performance, multi vehicle ATF designed to meet the requirements of a wide range of European, Asian and American vehicles and specifications.

ATF DIII-MV meets the stringent JASO-1A performance standard created by Japanese Automobile Manufacturers.

Due to the more severe requirements of their automatic transmissions. It also meets Ford Mercon V, Dexron III-H and Mercedes Benz 236.1 amongst many others.

For a full approval and specification list please refer to the technical data sheet or contact the technical department.

Available sizes: Bulk/210L Barrel/25L Drum/1 Litre.

### **Gear Oils** Hypoid EP Gear Oils API-GL4, 80w90

### **SD Gear Oils** API-GL5, 80w90 & 85w140

### **SSD LS** API-GL5, 80w90 & 75w90

### **ATF DII**

### **Semi Synthetic Gear Oils** API-GL4 75w90 & GL5 75w90

### **Full Synthetic Gear Oils** FD7, 75w80 & 75w90

Available Sizes: Bulk/210L Barrel/25L Drum.  
Please note that not all products are available in all sizes.

### **Anti-Freeze**

Anti-Freeze to BS6580 (Blue)  
EXL Long Life Anti-Freeze (Red)  
MB G48 Anti-Freeze

Available Sizes: Bulk/210L Barrel/25L Drum.

### **Ancillary Products**

**Air Brake Anti-Freeze**

**Dot 4 Universal Brake & Clutch Fluid**

**Greases**

**Soluble Oil Cleaner**

**Sorboil**

**Truck Wash**

ROCK OIL prides itself on it's advanced comprehensive range of oils, greases and lubricants for use in modern fleet and plant equipment. From axle and bearing greases through to specialist damping oils for suspension systems, to state of the art gearbox and engine oils including lubricants that meet the very latest long drain specifications.


Rock Oil's range of fleet automotive lubricants guarantee increased engine component life, reduced oil and fuel consumption and lower particulate emissions throughout the arduous commercial environment.



## **High Performance Lubricants**



# Commercial Range

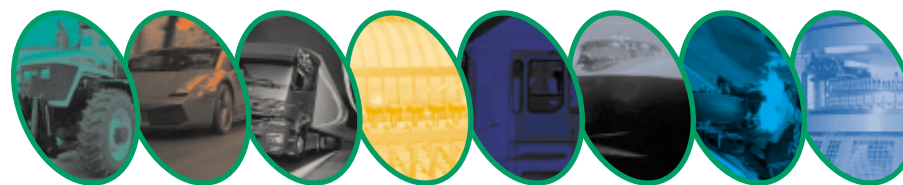

**Agriculture...Automotive...Commercial...Foodsafe...  
Industrial...Marine...Motorcycle...Textile...**

90 Priestley Street, Warrington, Cheshire WA5 1ST  
Tel: 00 44 (0)1925 636191 Fax: 00 44 (0)1925 632499  
Web: [www.rockoil.com](http://www.rockoil.com)  
email: [mail@rockoil.co.uk](mailto:mail@rockoil.co.uk)

[www.rockoil.com](http://www.rockoil.com)



**R**OCK OIL has vast commercial lubricant experience thanks to its 80 years of blending and manufacturing history. With today's modern commercial and plant applications, lubricants have to work harder than ever to ensure optimum performance and reliability. To achieve these demanding criteria, Rock Oil has succeeded in developing a sophisticated range of products to cater for every possible need, including, engine oils, gear oils, suspension fluids, brake fluids, anti-freeze plus a complete range of ancillary products. This pursuit of excellence has resulted in factory approvals by such prestigious manufacturers such as Volvo, Mack, Man, Caterpillar and Mercedes Benz amongst others.

Using the correct lubricant is essential in ensuring the long term reliability and protection of your engine. Every Rock Oil product is engineered to perform a specific task, assuring you of the highest performance for your own individual requirement.



### Synthesis Commercial 10w40 ultra high performance fuel efficient synthetic engine oil

Synthesis commercial is an ultra high performance 10w40 diesel oil specifically designed for the most technologically advanced automotive diesel engines. It contains an advanced combination of additives combined with the purest base stocks. This ensures wear is reduced and all engine components are kept clean. Due to its low viscosity it is classed as a "High Energy" lubricant, and meets the Mercedes Benz 228.5 and the European ACEA E4, E6 and E7 specifications. It is suitable for use in the latest Euro 4 & 5 Engines and is designed for use in SCR and EGR equipped vehicles. Use of Synthesis Commercial 10w40 in modern diesel engines results in greatly extended periods between oil changes, and hence less "off road" time for vehicles. It is specifically designed to meet future European SHPD requirements for low emission diesel engine powered vehicles.

It meets or exceeds the following specifications:  
ACEA E4, E6 & E7 API CI-4 Mercedes MB 228.51, 228.5  
Volvo VDS-3 MAN M3477, M3277 Reduced Ash  
Mack EOM + MTU Type III RVI, RXD, RLD, RLD-2  
DAF Extended Drain Capability SAE 10w40

Available Sizes: Bulk/210L Barrel/25L Drum/5L.



### Guardian Theta acea E5/E7 diesel engine oil

With the advent of Euro 3, 4 & 5 engines and the demands for lower emissions, improved fuel economy and extended service intervals, the demands on engine lubricants are more severe than ever before.

Guardian Theta is a premium quality mineral oil that has been specially developed to meet the aforementioned demands. Theta is also approved to the new ACEA E7 specification, whilst also meeting a host of stringent OEM requirements.

This level of performance is exceptional. The required chemistry to meet these new requirements also provides improved TBN retention, higher boost pressure stability, better anti oxidation control and engine cleanliness as well as phenomenal wear protection.

Guardian Theta is an extremely high specification diesel engine oil and also has very strong gasoline automotive engine performance. The oil is formulated with detergent, dispersant, anti-wear, corrosion and oxidation inhibitors and provides the maximum engine protection possible. It is available in 10w40 and 15w40 viscosities.

It meets or exceeds the following specifications:  
API CI-4/SL ACEA A3 B4 E2 E3 E5 E7 MACK EO-L Volvo VDS VDS-3  
MAN 271 & 3275 Mercedes MB 228.1 228.3, 229.1  
MTU Types 1 & 2 RVI RLD Cummins 20071/72/77 20076/78

Available Sizes: Bulk/210L Barrel/25L Drum/(5L/1L 15w40 only)  
10w40 and 15w40 grades available.



### Guardian Commercial SS high performance diesel engine oil

Guardian commercial ss is an ultra high performance 10w40 diesel oil specifically designed for the most technologically advanced automotive diesel engines. It contains an advanced combination of additives combined with the purest base stocks. This ensures wear is reduced and all engine components are kept clean. Due to its low viscosity it is classed as a "Energy Efficient" lubricant, and meets the Mercedes Benz 228.5 and the European ACEA E4 specifications amongst others. Use of Guardian commercial ss in modern diesel engines results in greatly extended periods between oil changes (100,000 km), and hence less "off road" time for vehicles. It is specifically designed to meet future European SHPD requirements for low emission diesel engine powered vehicles.

It meets or exceeds the following specifications:  
MAN M3277 Mercedes MB 228.5 (Long Drain) Volvo VDS-2  
MTU Type 3 MACK EO-L API CF ACEA E4 SAE 10w40

Available Size: Bulk/210L Barrel/25L Drum.



### Guardian E9 15w40 high performance diesel engine oil

Guardian E9 15w40 is an advanced heavy duty motor oil engineered to fulfil the ultra high performance diesel (UHPD) recommendations of major engine builders. It is suitable for use in the very latest EURO 5 compliant truck, bus and industrial engines. A lower Sulphated Ash, Phosphorus and Sulphur (SAPS) content ensures Guardian E9 15w40 is suitable for use with SCR (Selective Catalytic Reduction), EGR (Exhaust Gas Recirculation) and DPF (Diesel Particulate Filter) after treatment systems. It is capable of providing long drain service intervals for trucks driving long distances (always follow OEM recommendations).

It meets or exceeds the following specifications:

ACEA E9-08 API CJ-4/SM  
MB P.228.31 MAN M3275 MTU TYPE 2  
VOLVO VDS-4 RVI RLD-3  
CUMMINS CES 20081 MACK EO-O PP07  
CATERPILLAR ECF-1, ECF-3 DETROIT DIESEL 93K218

Available Size: Bulk/210L Barrel/25L Drum.



### Strata mixed fleet engine oils

Strata engine oils are a range of multi grade lubricants made from the finest base stocks available combined with state of the art additives. The oils are blended to exceed the requirements of the U.S. Army specification MIL-L-2104 E and also conform to the A.P.I. specification of SL/CG-4. Strata engine oils are recommended for use in naturally aspirated and turbo charged petrol and diesel engines where a SL/CG-4 specification is required.

Rock Oil has developed this 'universal' engine oil meeting the top diesel and gasoline engine oil specifications with mixed fleet applications in mind allowing for the selection of one oil for mixed fleet lubrication purposes.

Strata meets or exceeds the following specifications:  
API SL/CG-4 CF-2 ACEA A3 B3 B4 E3 Mercedes MB 228.3, 229.1  
Volvo VDS-2 VW 502.00/505.00  
Please refer to data sheets for full recommendations

Available Sizes: Bulk/210L Barrel/25L Drum/5L/1L.



### Turbo D monograde engine oil

Turbo D Monograde Oils are superior lubricants made from the finest base stocks available together with state of the art additives. They are blended to exceed the requirements of the diesel service category CD. As a result of this, these oils are suitable for all diesel applications whether commercial, automotive turbo or naturally aspirated.

This versatility allows for the selection of one oil for a wide range of diesel vehicles.

It meets or exceed the following specifications:  
API S/CF/CF-4 CAT TO-2 (Turbo D40 CF-2)

Please refer to data sheets for full recommendations

Available Size: Bulk/210L Barrel/25L Drum.